

fuego

the equipment cart system
with a powerful design


HAEBERLE

multifunctional medical
cart systems ...and more

price list

valid up from 1 July 2008

NEW models

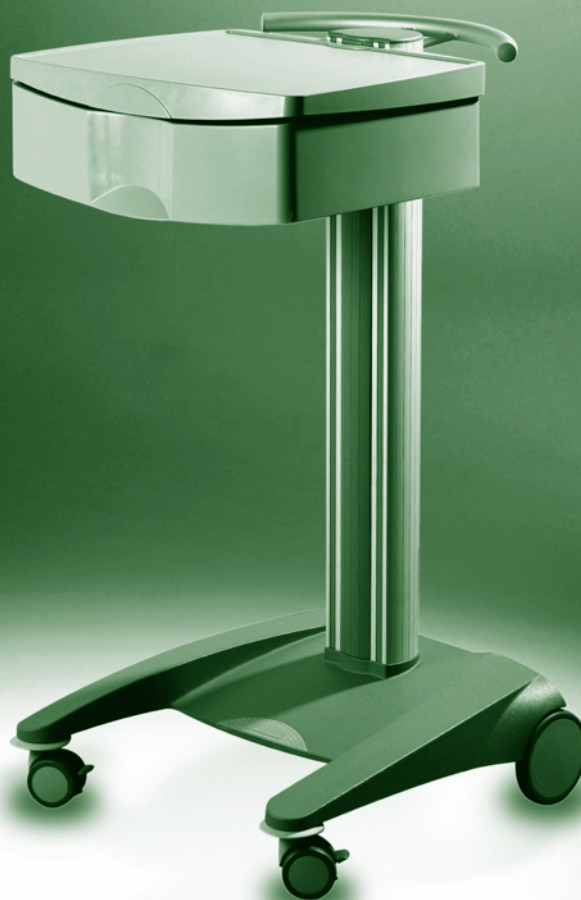



the equipment cart system with a powerful design

There are many good reasons for choosing fuego:

In the medical sector, fuego equipment carts are ideally suited for the mobile and flexible accommodation of smaller equipment, as computer carts, desks with convenient height adjustment, as ergometry carts, occasional carts, etc..

They are also suitable for use in all types of offices and meeting rooms where the elegant fuego carts offer mobile solutions, e.g. for video presentations, as mobile lecterns, as occasional carts, etc..

In addition to high functionality, the exceptional design and discreet colours of fuego equipment carts are also convincing. They are versatile, flexible, very sturdy and offer plentiful storage on a small footprint. Ideal for small rooms or anywhere requiring a large amount of storage in a small space.

fuego is protected with a European design patent and offers reliable brand quality at a reasonable price!

NEW!
**fuego with lift
and
fuego cart for
notebook**



HAEBERLE specialises in particular in providing customized OEM versions for industrial customers. Let us know your specifications and we will provide you with fuego equipment carts accented in your company colours, featuring your logo on the chassis and adapted to carry your equipment. Please contact us!

Note:

If you wish to accommodate larger or heavier equipment and if you are looking for an even more flexible cart system, then we also have the perfect solution:

**The swingo® and swingo®-clinic
equipment cart systems!**

Please request documentation.

Components:

- Sturdy and very versatile chassis frame with high-grade quality castors (front castors lockable and fitted with wall deflectors),
- Stable single-support aluminium profile for multiple socket boards, with large integrated cable channel for optimal accommodation of cables
- High-quality trays with shaped edge and recessed grip
- Beautifully designed drawer
- Elegant, steplessly adjustable and tilted desk shelves with roll protection for use, e.g. as mobile desk for lectures, presentations etc.
- Console shelves for small devices with stepless height adjustment
- Produced as standard with ergonomic handle
- Produced as standard with additional grey plastic cable storage clip, fixed to the rear of the profile
- Accessories for particular purposes, e.g. as ergometry cart.

Technical details and dimensions:

Exterior cart dimensions:	531 x 560 x 977 mm (w x d x h) 531 x 560 x 1.127 mm (w x d x h) 531 x 560 x 1.222 mm (w x d x h)
Complete load limit of the equipment cart:	60 kg
Aluminium profile height:	800 mm or 950 mm
Front castor diameter:	65 mm (lockable)
Rear castor diameter:	125 mm (fixed)
Electrically conductive castors:	available at additional charge
Trays external dimensions:	501 x 386 x 54.8 mm (w x d x h)
Trays footprint dimensions:	approx. 465 x 340 mm (w x d)
Desk shelves external dimensions:	495 x 542 x 18 mm (w x d x h)
Desk shelves tilt:	20°
Console shelves external dimensions:	431 x 330 x 15 mm (w x d x h)
Load limit trays/desk shelves/console shelves:	approx. 15 kg / 25 kg
Drawer external dimensions:	494 x 386 x 131 mm (w x d x h)

Materials and colours:


Mount profile:	Anodised aluminium
Profile canopy/cover:	Plastic, ABS, grey (6502B in accordance with NCS)
Chassis frame:	Aluminium sand-cast, powder-coated grey (6502B in accordance with NCS), fine structure
Decorative strips in the profile from PVC in the following colours:	grey (6502B in accordance with NCS) blue (3050-R80B in accordance with NCS) red-violet (3050-R40B in accordance with NCS) yellow (0050-Y in accordance with NCS) turquoise (1050-B50G in accordance with NCS)
Handle / Rail:	Steel tube, high-grade powder-coated RAL 9006 (white aluminium)
Trays:	high-grade and easy-care plastic, ABS, grey alternatively steel, powder-coated, RAL 9006
Desk shelves:	multiplex, stable hard-wearing laminate wood, birch, grey stain, 18 mm thick
Console shelves:	MDF (medium-density fibreboard) with a particularly fine surface, painted grey, 15 mm thick
Drawer:	ABS oriongrey with polished surface
Castors	Polyurethan

Item	Description	Ref no	Price €
------	-------------	--------	---------

Equipment Carts

All equipment carts are delivered ready assembled. Dimensions, material and technical details see page 3.

fuego 1 with drawer

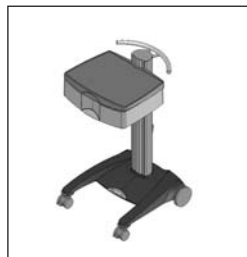

**977 mm high, with 1 drawer,
with 1 tray and pushing handle.**

Colour of decorative strips:

grey	1937.1
blue	1937.2
violet red	1937.3
yellow	1937.4
turquoise	1937.5

634,- A

fuego 1



**977 mm high, with 1 tray and
pushing handle.**

Colour of decorative strips:

grey	1906.1
blue	1906.2
violet red	1906.3
yellow	1906.4
turquoise	1906.5

478,- A

fuego 2



**977 mm high, with 2 trays and
pushing handle.**

Colour of decorative strips:

grey	1907.1
blue	1907.2
violet red	1907.3
yellow	1907.4
turquoise	1907.5

509,- A

fuego 3



**977 mm high, with 1 tray, socket board
with 4 sockets and pushing handle.**

Colour of decorative strips:

grey	1908.1
blue	1908.2
violet red	1908.3
yellow	1908.4
turquoise	1908.5

521,- A

fuego 4













**977 mm high, with 2 trays, socket board
with 4 sockets and pushing handle.**

Colour of decorative strips:

grey	1909.1
blue	1909.2
violet red	1909.3
yellow	1909.4
turquoise	1909.5

553,- A

Item	Description	Ref no	Price €
fuego 5	 <p>1.127 mm high, with 2 trays, socket board with 4 sockets and pushing handle.</p> <p>Colour of decorative strips:</p> <p>grey 1910.1 blue 1910.2 violet red 1910.3 yellow 1910.4 turquoise 1910.5</p>		581,- A
fuego 6	 <p>1.127 mm high, with 3 trays, socket board with 4 sockets and pushing handle.</p> <p>Colour of decorative strips:</p> <p>grey 1911.1 blue 1911.2 violet red 1911.3 yellow 1911.4 turquoise 1911.5</p>		628,- A
fuego 7	 <p>1.050 mm high (height of profile 800 mm), with 2 trays, 1 console shelf with mechanical height adjustment (adjustment height up to 300 mm) and pushing handle.</p> <p>Colour of decorative strips:</p> <p>grey 1915.1 blue 1915.2 violet red 1915.3 yellow 1915.4 turquoise 1915.5</p>		809,- A
fuego desk cart	 <p>1.070 mm high (height of profile 800 mm), with 1 tray, 1 desk shelf with mechanical height adjustment (adjustment height up to 300 mm) and pushing handle.</p> <p>Colour of decorative strips:</p> <p>grey 1914.1 blue 1914.2 violet red 1914.3 yellow 1914.4 turquoise 1914.5</p>		829,- A
fuego computer trolley 2	 <p>1.435 mm high, with a 75 and 100 mm VESA standard TFT screen mount, with a keyboard branch provided with a mouse pull-out; both attached to a height-adjustable column, with an extra shelf, a multipoint socket outlet with 4 sockets and a pushing handle.</p> <p>colour of decorative strips:</p> <p>grey 1928.1 blue 1928.2 violet red 1928.3 yellow 1928.4 turquoise 1928.5</p> <p>PC support as a systempart suitable for mounting on the profile</p>	<p>right 19230 left 19245</p>	<p>798,- A 63,- A 63,- A</p>

Item	Description	Ref no	Price €
fuego computer trolley 3	 <p>1.435 mm high, with a 75 and 100 mm VESA standard TFT screen mount, attached to a height-adjustable column, with a mouse pull-out and by 215 mm frontward extendable pull-out keyboard shelf, with an extra shelf, a multipoint socket outlet with 4 sockets and a pushing handle.</p> <p>Colour of decorative strips:</p>		
		grey	1930.1
		blue	1930.2
		violet red	1930.3
		yellow	1930.4
		turquoise	1930.5
			806,- A
	PC support as a systempart suitable for mounting on the profile		
		right	19230
		left	19245
			63,- A
			63,- A
fuego endoscopy cart	 <p>1.347 mm high (height of profile 950 mm), with 3 trays, socket board with 4 sockets, universal holder for endoscopy on height-adjustable column (adjustment height up to ca. 800 mm), for one-hand use, and a pushing handle.</p> <p>Colour of decorative strips:</p>		
		grey	1916.1
		blue	1916.2
		violet red	1916.3
		yellow	1916.4
		turquoise	1916.5
			825,- A
fuego ergometry cart 1 prepared for taking up the suction unit Strässle DT 100	 <p>1.048 mm high without suction unit (height of profile 800 mm), with 2 trays, socket board with 4 sockets and pushing handle. The cart is prepared to take up the suction unit, but delivery is WITHOUT suction unit.</p> <p>Colour of decorative strips:</p>		
		grey	1917.1
		blue	1917.2
		violet red	1917.3
		yellow	1917.4
		turquoise	1917.5
			756,- A
fuego ergometry cart 2 prepared for taking up the suction unit KISS	 <p>977 mm high without suction unit (height of profile 800 mm), with 2 trays, socket board with 4 sockets and pushing handle. The cart is prepared to take up the suction unit, but delivery is WITHOUT suction unit. The supporting tube of the KISS suction unit has to be adapted at our factory. Please send us the supporting tube of the suction unit together with your order.</p> <p>Colour of decorative strips:</p>		
		grey	1918.1
		blue	1918.2
		violet red	1918.3
		yellow	1918.4
		turquoise	1918.5
			711,- A
fuego ergometry-cart	 <p>1.650 mm high (high of profile 950 mm), with 2 trays, socket board with 4 sockets and pushing handle, 1 wire basket, cable and hose holder, ref. no. 19034.</p> <p>Colour of decorative strips:</p>		
		grey	1919.1
		blue	1919.2
		violet red	1919.3
		yellow	1919.4
		turquoise	1919.5
			773,- A

fuego with lift

NEW



1.222 mm, with 1 tray and front handle. The lift is powered by pneumatic spring action with stepless height adjustment (0,78 - 1,08 m). With socket board (3 sockets) and pushing handle.

The cart is suitable for seated and standing activities.

Colour of decorative strips:

grey	1950.1
blue	1950.2
violet red	1950.3
yellow	1950.4
turquoise	1950.5

789,- A

fuego with lift for TFT screen mount and keyboard shelf

NEW



1.222 mm, with keyboard shelf and mouse pad incl. handle, TFT screen mount. The lift is powered by pneumatic spring action with stepless height adjustment (0,78 - 1,08 m). PC support, socket board (3 sockets) and pushing handle.

The cart is suitable for seated and standing activities.

Colour of decorative strips:

grey	1951.1
blue	1951.2
violet red	1951.3
yellow	1951.4
turquoise	1951.5

889,- A

fuego cart for notebook

NEW



1.127 mm high, with tray for notebook and mouse pad, extendable to the right or left side, RAL 9006 white aluminium powder coated steel. Wire basket to be mounted at the rear side of the profile. Socket board (4 sockets) and pushing handle.

Colour of decorative strips:

grey	1952.1
blue	1952.2
violet red	1952.3
yellow	1952.4
turquoise	1952.5

692,- A

System parts

The reference numbers of the system parts include the complete range of attachment fittings.

Castors / Drawer


Castors

Surcharge

for 4 electrically conductive castors, 2 with Ø 65 mm (lockable), 2 castors with Ø 125 mm.

Ref. no. **19023** € 51,- A

Drawer



ABS oriongrey with polished surface to be mounted under a tray or under a drawer. Load capacity up to 10 kg.

Dim.:
494 x 386 x 131 mm (w x d x h)












Ref. no. **19300** € 169,- A

Lock

for the fuego drawer.
only for fitting in drawers incl. a tray

Ref. no. **19376** € 67,- A

Trays / Tray for notebook / keyboard shelf and mouse pad

<p>Tray</p> 	<p>ABS plastic Exterior dim.: 501 x 386 x 54,8 mm (w x d x h),</p> <p>Dim.: 464 x 340 mm (w x d)</p>	<p>Handle</p> 	<p>to be mounted at the front side of a tray, white-aluminium, RAL 9006</p> <p>Ref. no. 19367 € 95,- A</p>
<p>Load capacity up to 15 kg. Load capacity up to 25 kg.</p> <p>NEW</p>	<p>Ref. no. 19033 € 52,- A Ref. no. 19237 € 69,- A</p>	<p>Rail for storage shelf</p> 	<p>made from steel tube, high-grade powder-coated RAL 9006 (white aluminium), Ø 8 mm, surrounds shelf on three sides, as additional stop for equipment, fixed on profile.</p> <p>Ref. no. 19017 € 63,- A</p>
<p>Distance terminal</p> 	<p>fitting piece between shelf and column for more depth (3,8 cm)</p> <p>Ref. no. 19312 € 37,- A</p>	<p>Console shelf</p> 	<p>medium-density fibreboard (MDF) with particularly fine surface, painted grey, load capacity approx. 15 kg, mechanical height adjustment, adjustment height up to 300 mm.</p> <p>Dim.: 431 x 330 x 15 mm (w x d x h)</p> <p>Ref. no. 19088 € 258,- A</p>
<p>Tray</p> 	<p>steel, powder-coated, RAL 9006. Load capacity up to 25 kg.</p> <p>Dim.: 495 x 379 x 4 mm (w x d x h)</p> <p>Ref. no. 19330 € 97,- A</p>	<p>Desk shelf</p> 	<p>from stable hard-wearing laminate wood, birch, grey stain, with roll protection, fixed tilt 20°, load capacity approx. 15 kg, mechanical height adjustment, adjustment height up to 300 mm.</p> <p>Dim.: 495 x 542 x 18 mm (w x d x h)</p> <p>Ref. no. 19087 € 262,- A</p>
<p>Tray for notebook</p> 	<p>with mousepad, extendable to the right or left side; RAL 9006 white aluminium powder coated steel</p> <p>Setting dim. shelf: 491 x 370 mm (w x d)</p> <p>Mouse pull-out dim.: 100 x 171 mm (w x d)</p> <p>Ref. no. 19320 € 165,- A</p>	<p>keyboard and mouse pull-out shelf</p> 	<p>keyboard pull-out shelf extendable frontwards by 215 mm; mouse pull-out extendable sideways by 100 mm at each side; RAL 9006 white aluminium powder coated steel.</p> <p>Ref. no. 19220 € 155,- A</p>
<p>Tray for notebook</p> 	<p>extendable frontwards, attached to a height adjustable column, mouse pull-out extendable at each side; RAL 9006 white aluminium powder coated steel.</p> <p>Setting dim. shelf: 360 x 295 mm (w x d)</p> <p>Mouse pull-out each: 179 x 171 mm (w x d)</p> <p>Ref. no. 19319 € 251,- A</p>	<p>TFT mount with keyboard shelf and mouse pad</p> 	<p>mount for TFT monitor with VESA standard 75 and 100, on height-adjustable column made from nickel-chromium steel, max. adjustable height 300 mm, and solid keyboard arm with mouse pullout.</p> <p>Ref. no. 19222 € 280,- A</p>

TFT-mount / PC support

TFT-mount fixed



mount for TFT monitor, rotatable and inclinable but not height-adjustable.
Material: RAL 9006 white aluminium powder coated steel
Load capacity up to 15 kg.

Ref. no. **19418** € 129,- A

NEW

TFT-mount adjustable



mount for TFT monitor at a height-adjustable, 75 and 100 mm VESA standard column; RAL 9006 white aluminium powder coated steel
Load capacity up to 15 kg.

Ref. no. **19223** € 162,- A

PC support



for fastening sideways to the fuego profile; RAL 9006 white aluminium powder coated steel.
The flexible fixing strap ensures a firm hold of the processor. It is suitable for all conventional models, as the top mount is vertically adjustable.

right
Ref. no. **19230** € 63,- A

left
Ref. no. **19245** € 63,- A

Fixing device for double monitoring we offer on request!

Accessories

All accessories can be easily fitted to the carts. The reference numbers contain the accessory part complete with attachment fittings.

Cable and hose holder



grey, reach approx. 950 mm

Ref. no. **19034** € 141,- A

Cable and hose holder with flex-shaft



with 2 joints of plastic, arms in silver aluminium and chromium-plated flex-shaft. With attachment

Ref. no. **19396** € 285,- A

NEW

Infusion bottle holder



chrome plated with 4 hooks, Ø 25 mm, for one-hand use

Ref. no. **19035** € 195,- A

Wire basket



to be mounted at the front side of the profile, steel, powder-coated RAL 9006 (white aluminium)

Dim.:
418 x 268 x 100 mm (w x d x h)

Ref. no. **19135** € 69,- A

Wire basket




to be mounted at the rear side of the profile, steel, powder-coated RAL 9006 (white aluminium)

Dim.:
377 x 196 x 115 mm (w x d x h)

Ref. no. **19146** € 46,- A

Wire basket extendable



extendable to the front (215 mm), powder-coated RAL 9006 (white aluminium)

Dim.:
418 x 268 x 100 mm (w x d x h)

Ref. no. **19268** € 112,- A



Clip-holder

for mains cable

Ref. no. **19015** € 10,50 A



Holder for Kensington-lock

attached to the profile, for protection of notebooks. Without the lock.

Ref. no. **16424** € 16,- A

Socket board



4 grounding sockets in accordance with DIN 49440, 16A-230 VAC, light-grey cable HO5VVF, 3G 1.5 mm², 3 m in length with moulded grounding plug, green 2-pin switch, quality housing anodised aluminium, incl. 2 grey plastic fastening angles.

Dim.:
44,5 x 44,5 x 264 mm (w x d x h)

The multiple socket board corresponds to EN 60 601-1 and all other relevant DIN, EN and IEC standards.

Ref. no. **19029** € 82,- A

Socket boards for foreign standards, we offer on request!

Safety isolations transformers / Isolation guard

In operation or examination rooms there is normally a combination of more than one device such as cold light source, video processor, video recorder, high-frequency surgical equipment etc. on one equipment trolley. The power supply for the devices is normally provided using multi-socket strips, as there are often not enough mains sockets available.

Even if **the individual pieces of equipment do not exceed the permissible earth leakage current of max. 0,5 mA** the combination with the multi-socket strip the total earth leakage current may well be over this limit value. In the case of interruption of the protective conductor (simple malfunction) in the feed to the multi-socket strip patients will be endangered by a dangerously high earth leakage current.

By using safety isolation transformers, the devices connected will be supplied with earth-free voltage supply. This prevents a simple malfunction such as interruption of the protective conductor from endangering the patient. The transformers can also be used in rooms which have their own protective conductor system (e.g. operating rooms).

The isolation guard test the insulation resistance of ungrounded A.C. networks with superimposed direct current. If the insulation resistance remains under a certain value which is defined by the manufacturer, an audible sign happens.

Safety isolation transformer

NEW

mounted under the chassis

Power: 1000 VA
Voltage: 230 V / 115 V - primary switchable
Connection: built-in socket board (6 grounding sockets) IEC320 (cold plug-in devices)
Connection cable: 4 m cable with shock-proof plug
Power button: rocker switch 2-pin, placed at the column
Inrush current limitation: electrically controlled
Classification: safety class 1
According to standards: CE sign according to 93/42 EWG, EN 60601-1

Ref.no. **19416** € 875,- A

Safety isolation transformer with isolation guard

NEW

mounted under the chassis

Power: 1000 VA
Voltage: 230 V / 115 V - primary switchable
Connection: built-in socket board (6 grounding sockets) IEC320 (cold plug-in devices)
Connection cable: 4 m cable with shock-proof plug
Power button: rocker switch 2-pin, placed at the column
Inrush current limitation: electrically controlled
Classification: safety class 1
According to standards: CE sign according to 93/42 EWG, EN 60601-1


The isolation guard is integrated in the transformer housing. Please specify the output voltage 230 V or 115 V in your order.

Ref.no. **19422** € 1.198,- A

Planning sketch


fuego

997 mm high

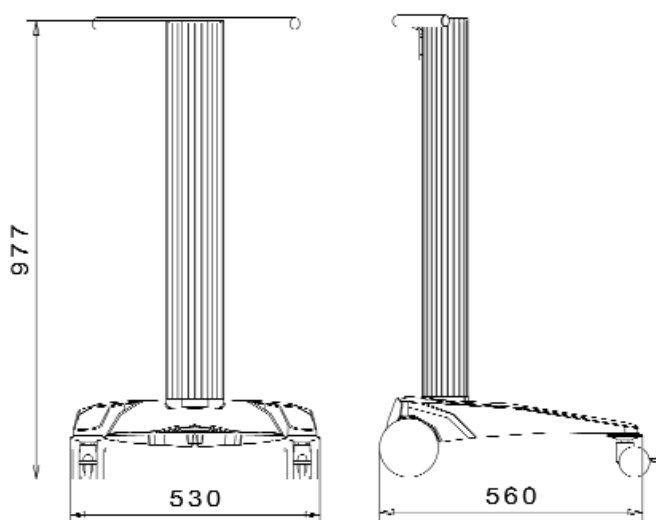

fuego

1.127 mm high

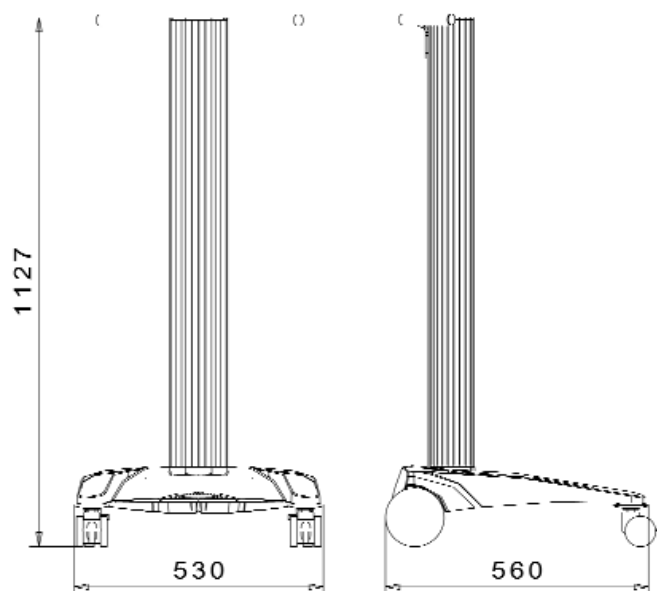

All prices are understood exclusive VAT. As an innovative company we reserve the right to amend prices and designs. As for the rest our General Term of Business in the valid version apply.

WEEE-Reg.-Nr. DE 20235235





Please contact us!

Your medical distributor